


Brass low-pressure 65°C washdown trigger guns



We produce brass (original and chromeplated) spray guns. Suitable for low pressure (6 bar), warm water (up to 65°C), 1/2" BSPP internal inlet applied.

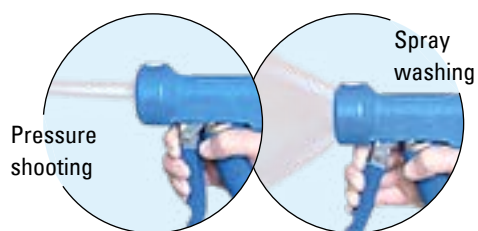

Rated Pressure	6 bar recommended, 10 bar maximum
Max. Flow	50 l/min 5 bar ~ 70 l/min 10 bar
Max. Temperature	65°C possible without additional tools, but personal precautions (heat insulating gloves, goggles and boots) still recommended
Inlet	1/2" BSPP
Insulated Cover	Silicone in blue, red, black and white
O-ring	FPM based sealant package
Marking	Arrow for outlet direction



INLET	TYPE	COVER	BR	BR, CHROMIUM
1/2	A B	● BLUE	590004	590003.1
1/2	A B	● RED	590004.01	-
1/2	A B	● BLACK	-	590003
1/2	A B	● WHITE	590001	-
1/2	A B	● BLUE	590005	-

304 medium-pressure 95°C washdown trigger guns




We produce spray guns made of SS 304. Suitable for medium pressure (16 bar), hot water (up to 95°C), 1/2" BSPP internal inlet applied.

Rated Pressure	16 bar recommended, 24 bar maximum
Max. Flow	50 l/min 5 bar ~ 70 l/min 10 bar
Max. Temperature	95°C possible without additional tools, but personal precautions (heat insulating gloves, goggles and boots) still recommended
Inlet	1/2" BSPP
Insulated Cover	Silicone in blue and red
O-ring	FPM based sealant package
Marking	Arrow for outlet direction

INLET	COVER	304
1/2	BLUE	590002
1/2	RED	590006

Brass & 304 low and medium pressure swivels, BSPP

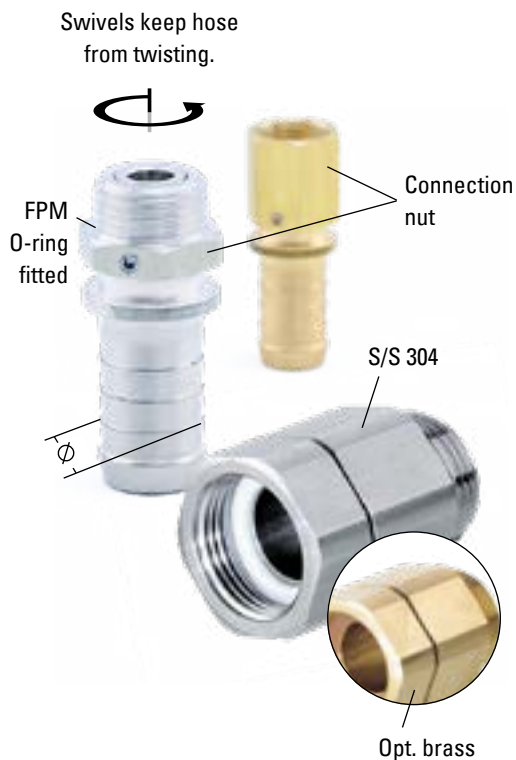

We offer BSPP swivels by hose tail or sealing thread for hose assembly to the trigger guns. The feature can keep the hose from twisting and easy to operate.

INSIDE (INCH)	Ø (MM)	NUT	BR FPM	304 FPM
1/2	13	BR	590015	590019
1/2	19	BR	590016	590020
1/2	13	316	-	590029
1/2	19	316	-	590030

OUTSIDE (INCH)	Ø (MM)	NUT	BR FPM	304 FPM
1/2	13	BR	590013	-
1/2	19	BR	590014	-
1/2	13	316	-	590050
1/2	19	316	-	590051

INSIDE (INCH)	OUTSIDE (INCH)	BR PTFE	304 PTFE
1/2	1/2	-	503900
1/2	1/2	-	-